

Watch

GPS Tracker

(Model:MT58)



Please carefully read the instructions of the smartwatch before use, so as to install and use it in a correct and easy way. The color is subject to the actual product!

I. QuickStart Guide:

1. Remove the battery cover, insert a micro SIM card .and activate the Caller Identification function and subscribe to a monthly traffic package (The 30M/month package is recommended).
2. Install the battery, put on the cover and then tighten the screws.
3. Press the ON/OFF key and loosen it after hearing the ringtone ,a message displayed on the screen indicates that the watch is in the ON state. (The watch cannot be powered off after receiving a signal. Only use the APP or the PC to shut it off.
4. **Download the app into your mobile phone (www.twogps.com), and then log in with the username which is the ID number labeled on the package or the battery, the password is 123456. You are advised to change the password after the first login.**
5. **Charging:** Use the charging cable clip to clamp the two contacts on the rear side of the watch following the direction of the arrow on the same side, and connect the other end of the charging cable to a computer or the charger.
6. **Emergency Call:** Press the Mom or Dad side key to dial the relatives number that is preset through the APP.
7. **Smart calling:** After setting the main monitor number, all phone numbers can call the watch directly when they are sent out from the factory. Whitelist phone numbers can call the device only after setting the main monitor numbers, SOS numbers . (To prevent haras sing phone calls)

II. Descriptions of the smart watch



III. Screen display




IV. Product Features:

- GPS+ Location Based Service Dual Mode Positioning
- SOS Emergency
- Geo Fence
- Anti-drop off Alarm
- Low Battery Alarm
- Historic Track
- Two-way Communication

V. Operations on the Client


1. App downloading and Logging In

- visit www.twogps.com to find the target application, install and download it into your mobile phone.
- Start the APP client, enter the ID number (with ten Arabic numbers) as mentioned before and password (the default password of all watches is 123456), and click the Login button. You are advised to change the password upon the first use.

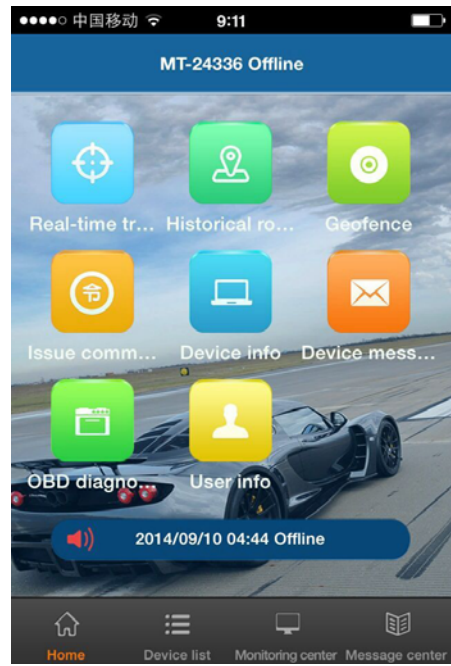

2. Real-time Tracking

- Enter the Real-time Tracking menu, and you can see the location of the watch. Click the Refresh button, the location of the watch can be updated. The map can be zoomed as you like.

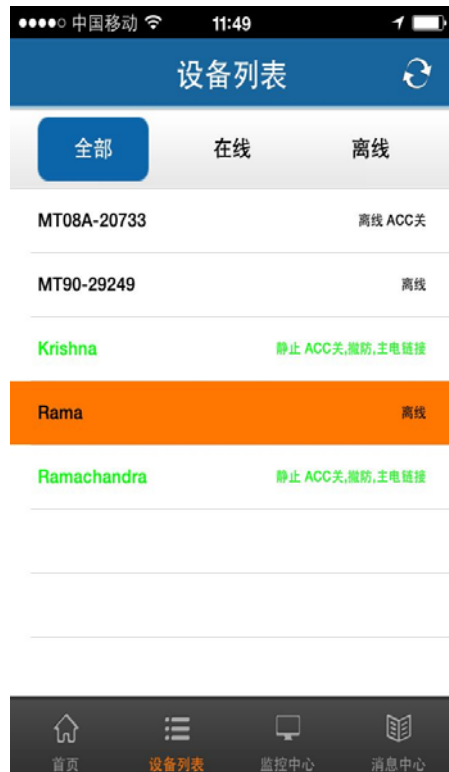

3. Settings(Commands)

SMS COMMANDS			
No	Item	SMS Text	Reply
1	Set center number:center, xxxxxxxxxxxx#	pw, 123456, center, 13640927062#	Number: 13640927062. Set successfully
2	Set slave number:slave, xxxxxxxxxxxx#	pw, 123456, slave, 13590276134#	Slave number: 13682431464 Set successfully
3	Change password:pw, xxxxxx#	pw, 888888#	[pw, 666999#] ok!
4	Set 3 numbers together	sos, 667062, 666134, 664214#	3 sos numbers 667062;666134;664214 SET OK
5	Set sos numnber1:sos1, xxxxxxxxxxxx#	sos1, 667062# (note: SOS numbers is 1~19 digits)	SOS Number1 667062 SET OK
6	Set sos numnber2:sos2, xxxxxxxxxxxx#	sos2, 666134#	SOS number2 666134 SET OK
7	Set sos numnber3:sos3, xxxxxxxxxxxx#	sos3, 664214#	SOS NUMBER3 664214 SET OK
8	Delete sos number: sosx#&sosx, d# (x=1, 2, 3)	sos1#&sos1, d#	SOS 1(2, 3) numbers deleted successfully
9	Set voice monitor phone:monitor, xxxxxxxxxxxx#	monitor, 667062#	Monitor number:667062. Set OK
15	Set GPRS tracking interval:upload, x#	upload, 300#	upload: 300s;ok!
20	Check google URL:url#(working with platform)	url#	[GPS] http://maps.google.com.hk/maps?q=N22.568657,E25
21			[BASE] http://maps.google.com.hk/maps?q=N22.568657,E25
25	Settings check:ts#	ts#	ver:G19C_BASE_V1.0_2014.05.19_09.38.29; ID:7893267577; imei:000078932675770; ip:121.37.43.203; port:8711; center:1252013640927062; slave:13530024214; sos1:664214; sos2:666134; sos3;; upload:300S; workmode:2;

			bat level:3; language:1; zone:8.00; GPS:NO(0); GPRS:OK(90); LED:ON; pw:123456;
30	Restart Device:reset#	reset#	Restart GPS
31	Reset factory settings:factory#	factory#	Reset GPS
	Set Ip/port	ip,113.10.245.151,8083#	Ip/PORT set OK
32	Language/timzone	lz, x, y#, x=0&1:Language, y:time zone, 0:English, 1:Chinese;East time zone:"+" is needed, west time zone:"-"	[lang, 0zone, 0#]ok!

Tips:

The product is specifically designed for children, elders and other groups needing custody. Do not use the product for illegal purposes, such as tracking and tapping other persons' privacy. All consequences arising from such illegal actions should be borne by the user! We will not be responsible for any loss incurred there from.